



# Kains



Level & Temperature Instrument

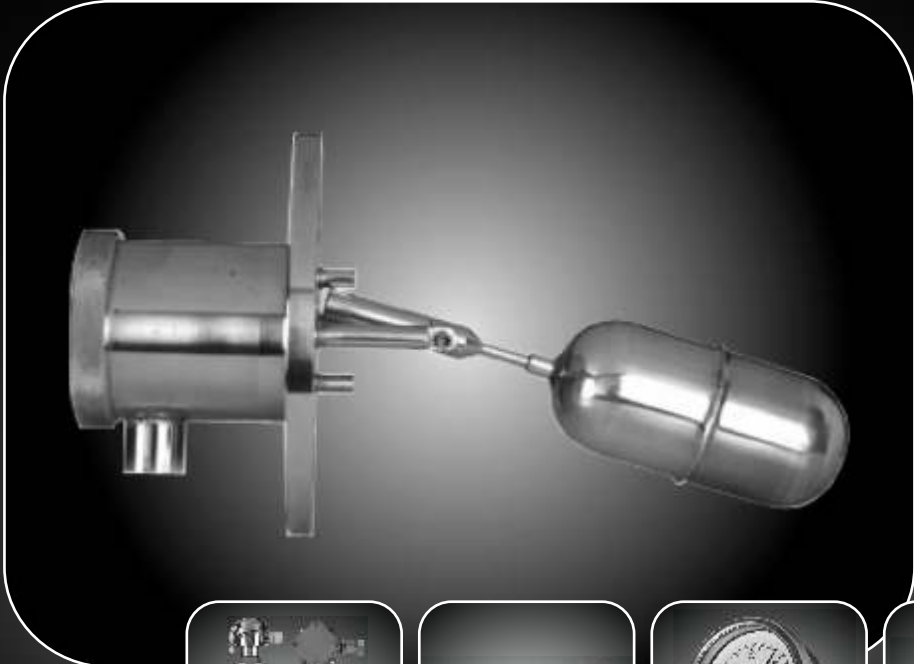

Side Mounting Switches

The series designed for integral mounting through the side of the process vessel are extremely robust and reliable. These are used when the insertion depth of the top mounted model is exceeded or overhead clearance prohibits the use of top mounted switches. Has broad compatibility for a wide range of liquid media in high temperature and pressure conditions.

Available in a variety of flange sizes in wetted parts of stainless steel 304 and 316 with 1 changeover (1 SPDT) non-isolated and 2 changeover (2 SPDT) non-isolated micro switch type.

### Two Level Float Switches

Vertical / top mounted custom length level switches are rugged, reliable and durable. Features single, bi-level & multi-level sensing with potential free contacts and in different switching configurations with wide choice of mounting and float materials.

Stem mounting: Stainless steel, float: 316 SS dia 52mm

Also available with PU Foam dia 35mm float option

Available in all SPST & SPDT switch configurations



Top Mounting Switches



Multi Level Switches

### Multi Level Float Switches

Vertical / Top mounted switches with physically stronger buoyant floats capable of operating in contaminated or turbulent media. Ideal for high temperature and pressure conditions. Comes with a choice of mountings, floats, and terminations having a wide range of applications in water, oils, and chemicals, petrochemical and corrosive liquids.

Stem Mounting: Stainless steel, Float: 316 SS dia 52mm

Available in single, bi-level and multilevel sensing in all SPST, SPDT with multiple float options.

**Type:**

Weather proof / Non weather proof

**Specification**

Nominal sizes: 2 1/2", 4", 6"

Case and Bezel: MS rust protected /S S with screwed bezel

Bulb / Stem : 304 S S / 316S S

Temperature Range: up to 600 Deg. Celsius

**Optional**

Snap action magnetic contact



Filled System Temperature gauge



BI metal temperature gauge

**Type:**

Weather proof / Non weather proof

**Specification**

Nominal sizes: 2 1/2", 4", 6"

Case and Bezel: MS rust protected /S S with screwed bezel

Stem : 304 S S / 316S S

Temperature Range: up to 400 Deg. Celsius

**Type:**

Weather proof / Non weather proof

**Specification**

Nominal sizes: 2 1/2", 4", 6"

Case and Bezel: MS rust protected /S S with screwed bezel

Bulb / Stem : 304 S S / 316S S

Capillary: 304 S S / 316 S S / Copper

Temperature Range: up to 600 Deg. Celsius

**Optional**

Snap action magnetic contact



Remote mounting Temperature gauge

Some Major Sectors that **Kains** Serves



Beverages



Pharmaceutical



Ship Building



Chemical Industry



Pulp & Paper



Cement




Power Plant



Steel Plant



Refinery



Petrochemical



Machine Tool



Bio Tech



## **kains Instruments India Pvt. Ltd**

#9A, Jyothi Complex Road, Abbigere Main Road,  
Kammagondanahalli, Jalahalli West, Bangalore-560 015  
Ph:+9180 23457877, 23457887, Fax: +9180 23457867,  
Email: sales@kainsindia.com

**[www.kainsindia.com](http://www.kainsindia.com)**