



Inside >>

General Specification	3
Ordering Information	4
Standard Ranges	5
Bottom connection direct Mounting	6
Bottom connection surface Mounting	7

General Specification

Application

For Industrial pressure measurement

Type

Weather proof

Glycerin filled




Model	KGG10	KGG11	KGG12
Type	Weather proof	Weather proof	Weather proof
Case and bezel	SS 304 (Screwed bezel)	SS 304 (crimped bezel)	M S rust protected (Pressed bezel)
Bourdon Tube	SS 316	Brass	Brass
Socket	SS 316	Brass	Brass
Sector mechanism	SS 316	Brass	Brass
Dial	Aluminum	Aluminum	Aluminum
Dial marking	Black marking on white surface	Black marking on white surface	Black marking on white surface
Scale	Dual Scale (Kg/cm ² and PSI Standard ranges)	Dual Scale (Kg/cm ² and PSI Standard ranges)	Dual Scale (Kg/cm ² and PSI Standard ranges)
Window	Glass/ Snap in acrylic	Glass/ Snap in acrylic	Glass/ Snap in acrylic
Pointer	Black Aluminum/ Black ABS	Black Aluminum/ Black ABS	Black Aluminum/ Black ABS
<i>Dimension & other specification</i>	<i>Refer KPG Models</i>	<i>Refer KHG Models</i>	<i>Refer KUG Models</i>

Optional

- Can be used for – Oxygen, Acetylene, Hydrogen, Nitrogen, Argon etc...
- NPT & Other standard Threads
- Customized dial markings
- Other Units: Kpa, Mpa, bar, ton, atm and torr
- Externally adjustable red follower pointer
(2.5", 3", 4" & 6")
- Nickel plated socket
- Special colored Case & Bezel

Ordering Information

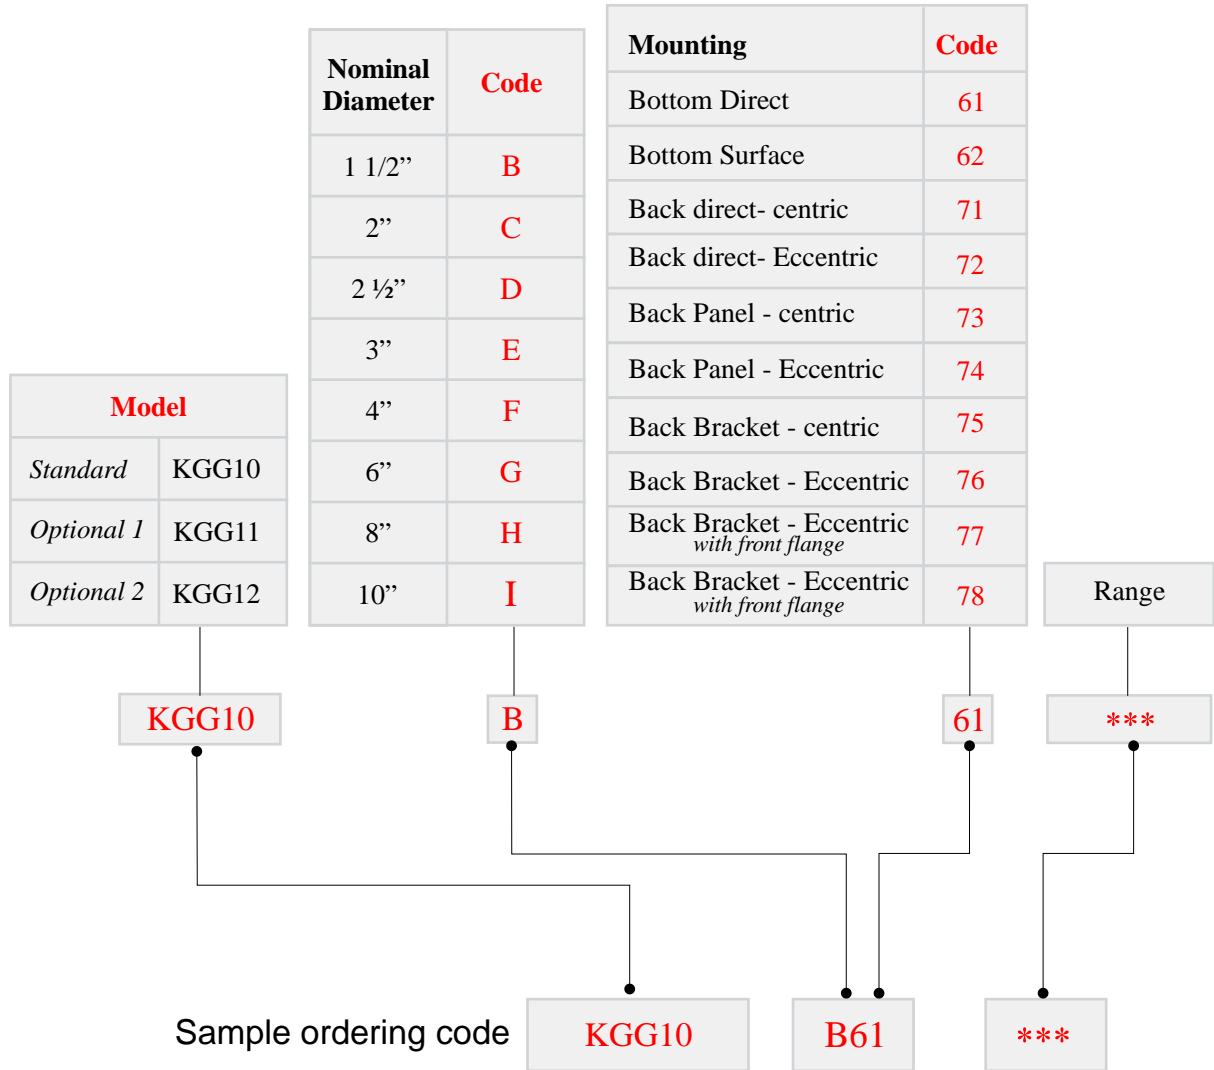

* Select ranges from the following table

* Name the gas while ordering

* Specify Optional requirements

Standard Ranges

Duel Scale	
Pressure ranges	Code
0 ... 15 PSI / 1.06Kg/cm2	201
0 ... 30 PSI / 2.1 Kg/cm2	202
0 ... 60 PSI / 4.2 Kg/cm2	203
0 ... 100 PSI / 7 Kg/cm2	204
0 ... 150 PSI / 10.6 Kg/cm2	205
0 ... 200 PSI / 14 Kg/cm2	206
0 ... 250 PSI / 17.5 Kg/cm2	207
0 ... 300 PSI / 21 Kg/cm2	208
0 ... 400 PSI / 28 Kg/cm2	209
0 ... 600 PSI / 42 Kg/cm2	210
0 ... 1000 PSI / 70 Kg/cm2	211
0 ... 1500 PSI / 106 Kg/cm2	212
0 ... 2000 PSI / 140 Kg/cm2	213
0 ... 2500 PSI / 175 Kg/cm2	214
0 ... 3000 PSI / 210 Kg/cm2	215
0 ... 4000 PSI / 280 Kg/cm2	216
0 ... 6000 PSI / 420 Kg/cm2	217
0 ... 10000 PSI / 700 Kg/cm2	218
0 ... 15000 PSI / 1060 Kg/cm2	219
Other Optional - specify	200

Single Scale	
Pressure ranges	Code
0 ... 1 Kg/cm2	101
0 ... 1.6 Kg/cm2	102
0 ... 2.5 Kg/cm2	103
0 ... 4 Kg/cm2	104
0 ... 6 Kg/cm2	105
0 ... 10 Kg/cm2	106
0 ... 16 Kg/cm2	107
0 ... 25 Kg/cm2	108
0 ... 40 Kg/cm2	109
0 ... 60 Kg/cm2	110
0 ... 100 Kg/cm2	111
0 ... 160 Kg/cm2	112
0 ... 250 Kg/cm2	113
0 ... 600 Kg/cm2	114
0 ... 1000 Kg/cm2	115
Other Optional - specify	100

Duel Scale	
Vacuum and Compound	Code
0.... - 760 mm Hg	301
-760 ... 1.06 Kg/cm2	302
-760 ... 2.1 Kg/cm2	303
-760 ... 4.2 Kg/cm2	304
-760 ... 7 Kg/cm2	305
-760 ... 10.6 Kg/cm2	306
-760 ... 14 Kg/cm2	307
-760 ... 17.5 Kg/cm2	308
-760 ... 21 Kg/cm2	309
-760 ... 28 Kg/cm2	310
Other Optional - specify	300

Single scale	
Vacuum and Compound	Code
0 ... - 1 Kg/cm2	401
- 1 ... 1kg/cm2	402
- 1 ... 2kg/cm2	403
- 1 ... 2.5kg/cm2	404
- 1 ... 4kg/cm2	405
- 1 ... 6kg/cm2	406
- 1 ... 7kg/cm2	407
- 1 ... 10kg/cm2	408
- 1 ... 16kg/cm2	409
- 1 ... 25kg/cm2	410
Other Optional - specify	400

Size	1 ½"	2"	2 ½"	3"	4"	6"	10"
Available Range	202 - 209	201 - 217	201 - 217	201 - 217	201 - 219	201 - 219	201 - 219
	103 - 108	101 - 113	101 - 113	101 - 113	101 - 115	101 - 115	101 - 115
	XXXXX	301 - 306	301 - 306	301 - 306	301 - 310	301 - 310	301 - 310
	XXXXX	401 - 408	401 - 408	401 - 408	401 - 410	401 - 410	401 - 410

General Specification

Type

Weather proof
Glycerin filled
Commercial




Model	KAG11	KAG21	KAG10	KAG20	KAG12	KAG 22
Type	Weather proof	Glycerin filled	Weather proof	Glycerin filled	Weather proof	Glycerin filled
Case and bezel	SS 304 (Screwed bezel)		SS 304 (Screwed bezel)		M S rust protected (Screwed / pressed bezel)	
Bourdon Tube	SS 316		SS 304		SS 304	
Socket	SS 316		SS 304		SS 304	
Sector mechanism	SS 304		SS 304		SS 304	
Dial	Aluminum		Aluminum		Aluminum	
Dial marking	Black marking on white surface		Black marking on white surface		Black marking on white surface	
Scale	Duel Scale (Kg/cm ² and PSI Standard ranges)		Duel Scale (Kg/cm ² and PSI Standard ranges)		Duel Scale (Kg/cm ² and PSI Standard ranges)	
Window	Glass/ Snap in acrylic		Glass/ Snap in acrylic		Glass/ Snap in acrylic	
Pointer	Black Aluminum/ Black ABS		Black Aluminum/ Black ABS		Black Aluminum/ Black ABS	
<i>Dimension & other specification</i>	<i>Refer KPG Models</i>		<i>Refer KPG Models</i>		<i>Refer KUG Models</i>	

Optional

- NPT & Other standard Threads
- Customized dial markings
- Special colored Case & Bezel

Nominal Diameter		Accuracy		Connection
inch	mm	KAG10 KAG11 KAG12	KAG20 KAG21 KAG22	
4"	100mm	1.5%	2%	1/4" NPT

Ordering Information

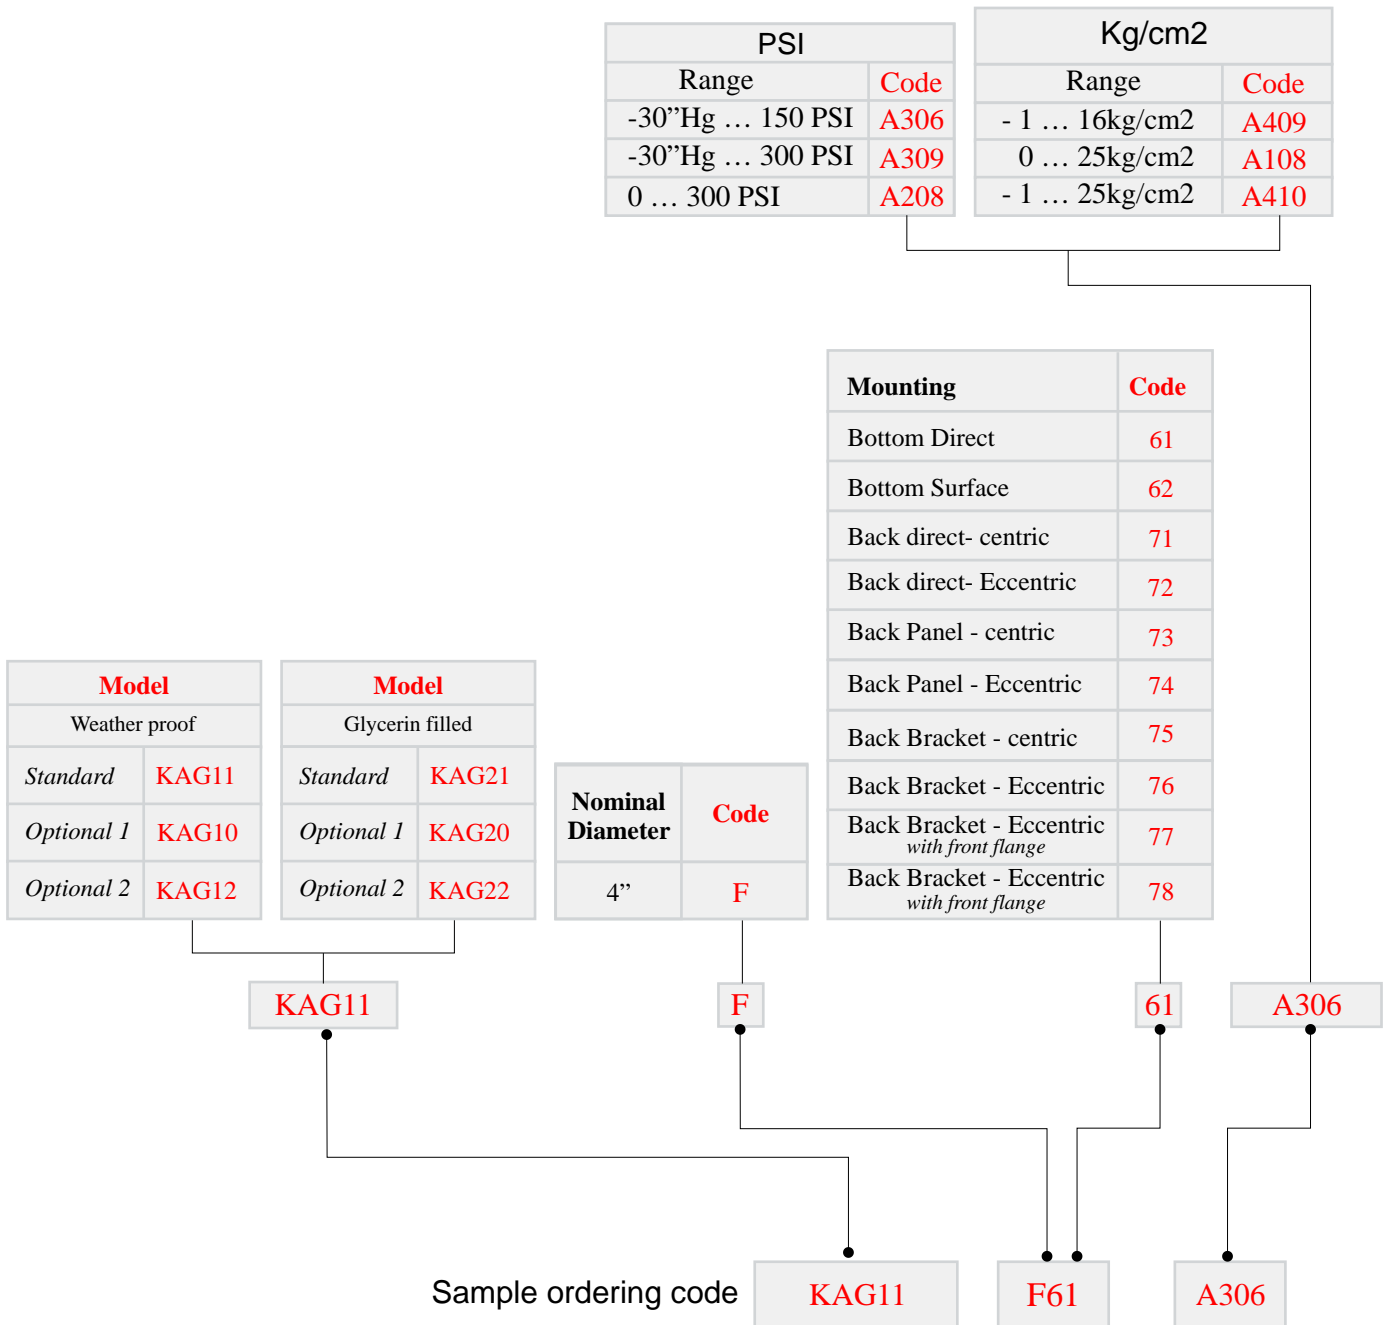

* Specify Optional requirements